

CEILING BOOM Z-SERIES



- ✓ 360° rotation
- ✓ polished stainless steel
- ✓ tough design
- ✓ self lubricated ball bearing
- ✓ high quality swivels included
- ✓ insulated high pressure hose
- ✓ hose protection / tension relief
- ✓ ready to use

Technical Data

Pressure	4000 psi (27.5 MPa)
Temperature	250°F
Inlet (top & side)	3/8" NPTF
Outlet	3/8" NPTF
Throughput medium	pH 3 - 12





DKZ


Part No.	L	A	B	C	D	Weight
65.009	4'9"	14'	34"	55"	28"	22 lbs
65.019	5'1"	15'	36"	59"	30"	23 lbs
65.029	5'5"	16'	38"	63"	32"	24 lbs
65.039	5'9"	17'	40"	67"	34"	26 lbs

Part No. includes one ceiling boom


Accessories see page 107

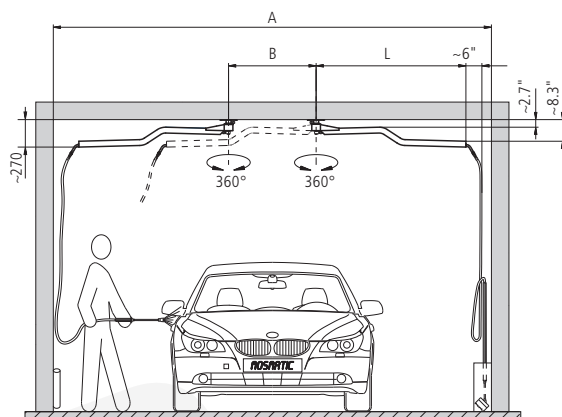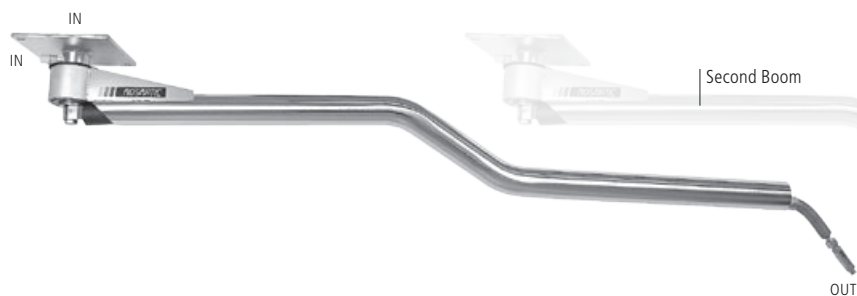


Triple Set-up

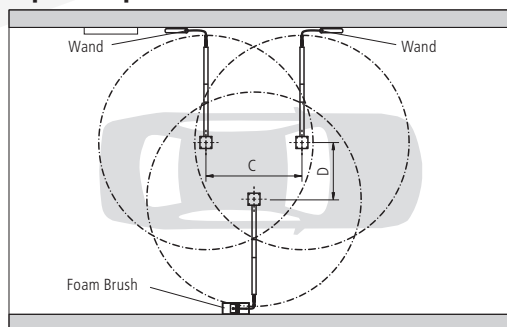


Dual Set-up

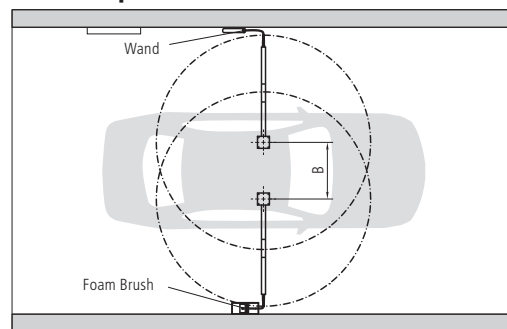

Quadruple Set-up

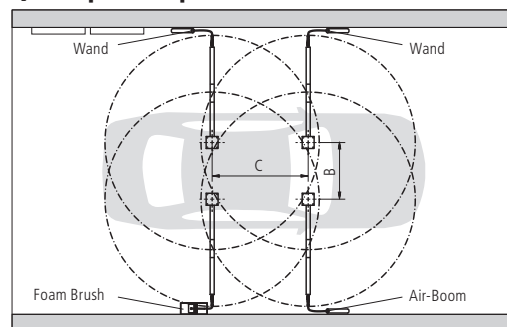

Ceiling Mounting Plate



Bearable load for each bore
at least 30'000 N
(for example 1/2" bolt)

DKZ booms must be extended with part no. 902.753.

Legend

M.. = metric thrust, **..M** = male, **F** = female, **G** = gas pipe thrust, **QV** = quick connects, **SV** = profile ring fitting
D = diameter, **k** = conical, **L** = length, **NW** = nominal width, **SW** = wrench size, **IN** = media input, **OUT** = media output, **RS** = basic position