

- ✓ 360° rotation
- ✓ polished stainless steel
- ✓ tough design
- ✓ self lubricated ball bearing
- ✓ high quality swivels included
- ✓ insulated high pressure hose or insulated high pressure pipe
- ✓ hose protection / tension relief
- ✓ ready to use


Technical Data

Pressure	4000 psi (27.5 MPa)
Temperature	250°F
Inlet (top & side)	3/8" NPTF
Outlet	3/8" NPTF
Throughput medium	pH 3 - 12




DDP

Part No.	L1	L2	L3	Weight
67.409	4'9"	5'3"	-	39 lbs
67.419	5'3"	5'9"	-	41 lbs
67.429	5'9"	6'3"	-	42 lbs
67.439	6'3"	6'9"	-	44 lbs
67.449	6'9"	7'5"	-	46 lbs
67.459	7'5"	8'2"	-	48 lbs

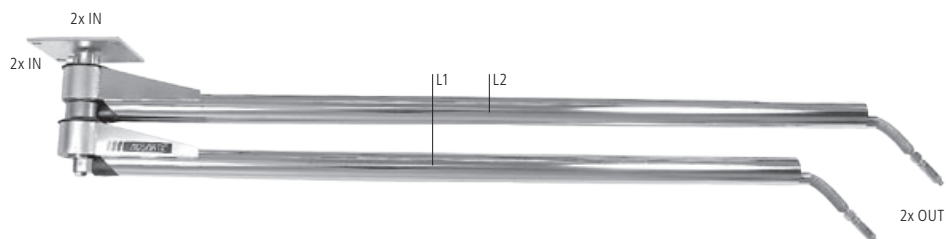


DP3

Part No.	L1	L2	L3	Weight
69.419	4'9"	5'3"	5'9"	54 lbs
69.429	5'3"	5'9"	6'3"	56 lbs
69.439	5'9"	6'3"	6'9"	58 lbs


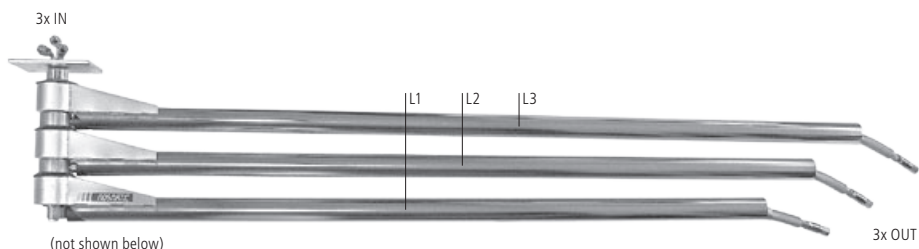


Accessories see page 107

Ceiling Mounting Plate



Bearable load for each bore at least 30'000 N (for example 1/2" bolt)

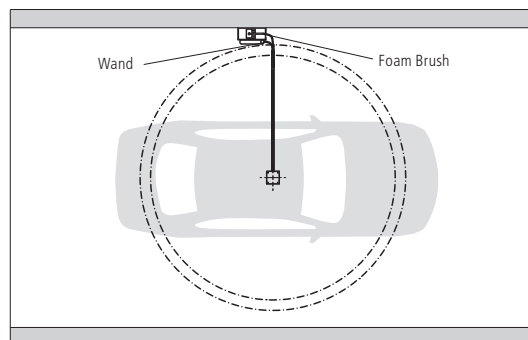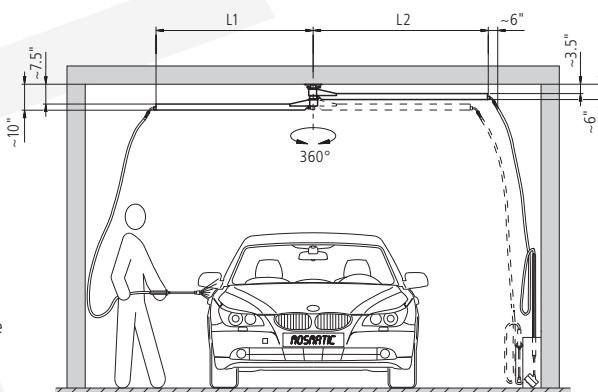

Legend

M.. = metric thrust, **..M** = male, **F** = female, **G** = gas pipe thrust, **QV** = quick connects, **SV** = profile ring fitting
D = diameter, **k** = conical, **L** = length, **NW** = nominal width, **SW** = wrench size, **IN** = media input, **OUT** = media output, **RS** = basic position